INSTRUCTION SHEET BUCK

-J00994

Kit Number 61508-97Y

REV. 9-10-97

QUEST TANK BAG

General

1

The Quest Tank Bags is designed to fit all S3 and S3T and S1 White Lightning models. Kit contents are as follows:

QTY DESCRIPTION	
-----------------	--

1 Quest Tank Bag 1 Shoulder Strap

Rain Cover

ap 6

PART NO. Not sold separately 61509-97Y 61565-97Y

NOTE

Before beginning initial installation and each time you reinstall your Quest Tank Bag, wash your motorcycle and apply several coats of a high quality wax on the body work.

A Service Manual for your vehicle is available from your Buell Dealer.

Installation of Tank Bag mount straps

- 1. Remove seat according to Service Manual instructions.
- 2. Remove the fuel tank retaining hex bolt.
- 3. Put hex bolt through the grommet of the rear mounting tab, then through the oval washer. Replace bolt and tighten.
- 4. Replace seat making sure the rear mounting tab is sticking out.

5. See Figure 1. Loop one of the front mount straps around the top frame tube near the steering head tube, feed back through the plastic loop. Repeat on the opposite side. Feed each end through the webbing keeper and through the plastic buckles.

AWARNING

Do not pinch or capture hoses or wires in the web assembly. If hoses or wires are pinched, it could cause steering and/or handling problems which may lead to personal injury.

Installation Tank Bag

- 1. Attach the buckle of the rear mount tab to the matching rear tank bag buckle.
- 2. Attach the 2 front strap mount buckles to the front mount buckles on the tank bag.
- 3 See Figure 1. Pull the front mount straps tight and feed excess strap material through the web keeper. This will keep the excess material from flapping.

HELPFUL HINTS

When filling up with gas, unbuckle both front strap mounting buckles and place the tank bag, map pocket side down, on the seat. When done, re-clip buckles and tighten the straps.

When traveling without the tank bag, you can roll the rear mount tab and place under the seat. This will keep the mount tab and buckle from flapping.

WARNING

Be certain that the rear mount tab does not interfere with the seat mounting tongue. Interference will cause an improper seat fit and may lead to personal injury.

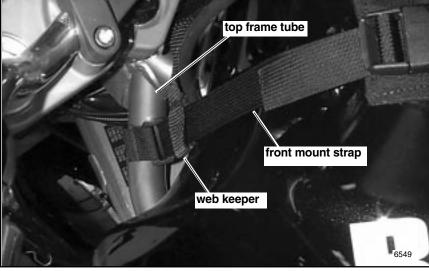


Figure 1. Tank bag installation